



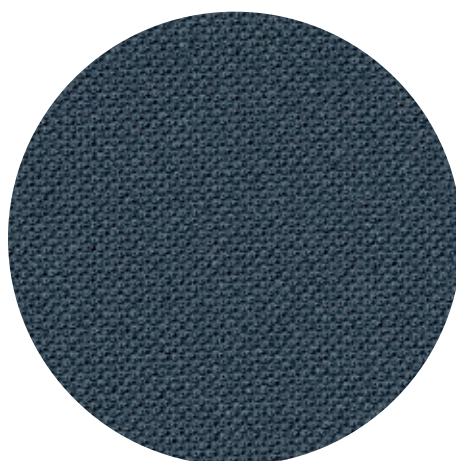

ATLANTIC™

by Gabriel



60061



60063



64117



60141




61166



61078



63033



60142




63055




60025




61163




63057



60999




61165



61164




63056




64116



63034



64105




65074




64093




65073



64089



65075




60011



64092




65037



60143



60143



66126




66063



62049



66125



66086



62048



66062




68054



66041




67030




68099



66064



66057



67043

ATLANTIC™

Design no.	8690
Fields of application	contract furnishing
Material	polyester
Weight	530 gr/lm · (1.17 lbs/ly)
Width	150 cm · (59")
Abrasion resistance	rubs · BS EN 14465 · EN ISO 12947-2 (Martindale) 110,000
Pilling	scale 1-5, max 5 · EN ISO 12945-2 4-5
Colour fastness to light	scale 1-8, max 8 · EN ISO 105 - B02 5-7
Colour fastness to rubbing	scale 1-5, max 5 · EN ISO 105x12 (wet/dry) 4-5
Cleaning	dry cleaning P(W)
	 shrinkage: max 3%
Flammability	EN 1021 1&2 · CAL 117 · Önorm B 3825 B1 3800-Q1 UK · AM 18 - NF D 60-013 · NFP 92-503:M3 · UNI 9175 Class 1 I EMME
	 AATCC 16 Lightfastness pass
	 AATCC 8 or 116 wet/dry crocking pass
	 California Bulletin CAL 117-E Class 1 pass
	 ASTM D4157-02 Wyz Abrasion pass
	 ASTM D3511 Pilling pass
Design/Colours	Inger Mosholt Nielsen
Subject to changes and colour differences	



QUALITY SYSTEM AND ENVIRONMENTAL MANAGEMENT SYSTEM
DS/EN ISO 9001
DS/EN ISO 14001

