




XPRESS™


by Gabriel

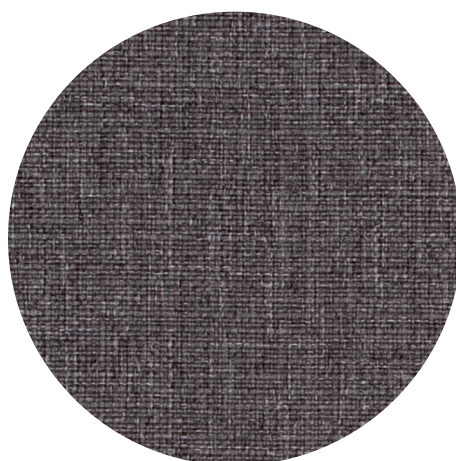


60162



61183




62002



60003



61003




63062



60004



68107



63013



60999



61184



64083



65011




65081




68002




65011




66008



68005




65082



66009



68106



66010



61004



65011 Laminated 2,5 mm 24 kg polyester + 38 gr/m² circular knit backing



65011 Laminated 2,9 mm 35 kg polyester (Nordic ecolabel) + 38 gr/m² circular knit backing



65011 Laminated 5 mm 35 kg polyester + 38 gr/m² circular knit backing

XPRESS™

Design no.		40-8622
Fields of application		bedding · screen
Material fabric	polyester	100%
Material foam	polyurethane	100%
Material backing	polyester	100%
Weight	270 g/lm · (8.71 oz/lin.yd.)	
Width	170 cm · (67")	
Abrasion resistance	rubs · BS EN 14465 · EN ISO 12947-2 (Martindale)	35,000
Pilling	scale 1-5, max. 5 · EN ISO 12945-2	4-5
Colour fastness to light	scale 1-8, max. 8 · EN ISO 105 - B02	5-7
Colour fastness to rubbing	scale 1-5, max. 5 · EN ISO 105x12 (wet/dry)	4-5
Maintenance	dry cleaning · wipe with a damp cloth P(W)	
Flammability	EN 1021 1&2 · BS 476-7 class 1. Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used.	
Design/Colours	Inger Mosholt Nielsen	
Subject to changes and colour differences		

